



## S-150 • S-200 • S-250 Ice Dispensers



Servend's S-Series ice dispensers feature a no-hassle one-piece structural base, strengthened drive train, and modular design, all resulting in a more durable ice dispenser.


### Standard Features

- Servend's patented paddle wheel ice dispense technology maximizes counter space.
- Use with Multiplex remote refrigeration unit with optional beverage valves.
- One-piece ABS base provides a solid foundation as well as adding structural rigidity to the dispenser.
- Enhanced agitation and drive system provides consistent ice dispense and ease of serviceability.
- Patented Rocking Chute™ simplifies ice dispensing and storage.
- Surround View™ merchandiser with attractive "ice" graphics draws customer attention.



## Specifications

	S-150	S-200	S-250
Standard Features	Lighted merchandiser, Ice graphics, leg kit, and drain kit.		
Approx. Shipping Weights	185.12 lbs. / 69.09 kgs.	235 lbs. / 107 kgs.	260 lbs. / 152 kgs.
Countertop Weight (w/o ice)	133.12 lbs. / 60.38 kgs.	184 lbs. / 69 kgs.	204 lbs. / 118 kgs.
Ice Storage Capacity	Up to 150 lbs. / 68 kgs.	Up to 200 lbs. / 91 kgs.	Up to 250 lbs. / 114 kgs.
Electrical Requirements	Dispenser: 120V/60Hz/2.8FLA. 220V/50Hz/1 also available.		
Drain	Single 0.75" (1.91 cm) PVC (N.P.T.) drain fitting extends from drain pan Units can be drained from the bottom or back of unit.		
Ice Machine Compatibility	Manual fill or top-mount with compatible ice machines. Contact MBE for adapter kit requirements for top-mounted ice machine applications.		
Options	Flomatic water valve. Side splash panels. Flomatic 424 and 464 beverage valves, available in sanitary lever, push button, portion control and autofill valve. Other valves available, contact factory for details.		

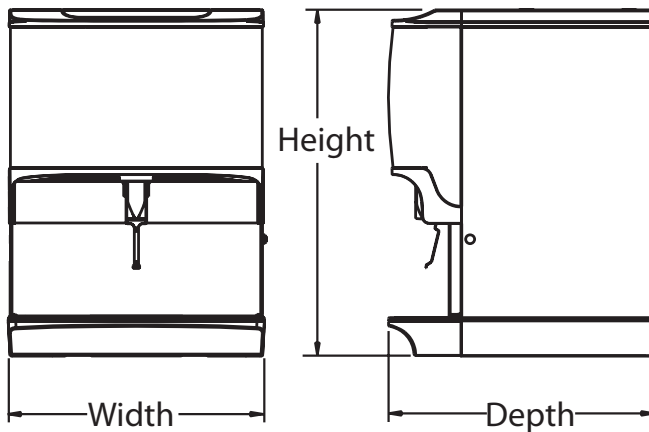

	S-150	S-200	S-250
Width	23.00"	30.00"	30.00"
	58.42 cm	76.20 cm	76.20 cm
Depth	31.13"	31.13"	31.13"
	79.07 cm	79.07 cm	79.07 cm
Height*	34.88"	34.88"	40.88"
	88.60 cm	88.60 cm	103.8 cm

\*Height dimension without full lid.  
Add .50" (1.27 cm) for full lid.

3769B ©2010 Servend 3/10 Continuing product improvement may necessitate change of specifications without notice.